

R-9111

## C4 OUTSIDE BELT MOUNT KIT INSTALLATION INSTRUCTIONS

The R-9111 outside belt mount kit has been designed to provide a mounting point for floor mount (snap in mount) lap belts without disabling the factory seat belt. These parts are components of our R-1110 Harness Mount and have a mounting point for a support rod that will not be used for this installation.

### Step 1

Remove driver side lower seat cushion. This is done by unhooking a bail wire located under the front portion of the seat.

### Step 2

Remove (4) seat from seat track mounting bolts. Remove seat. Carefully remove and unplug any wires or air hoses for lumbar supports before removing seat.

### Step 3

With the seat removed you can access the seat belt retractor mechanism located along the door sill. Remove the mounting bolt (T-500 socket – see figure 1)

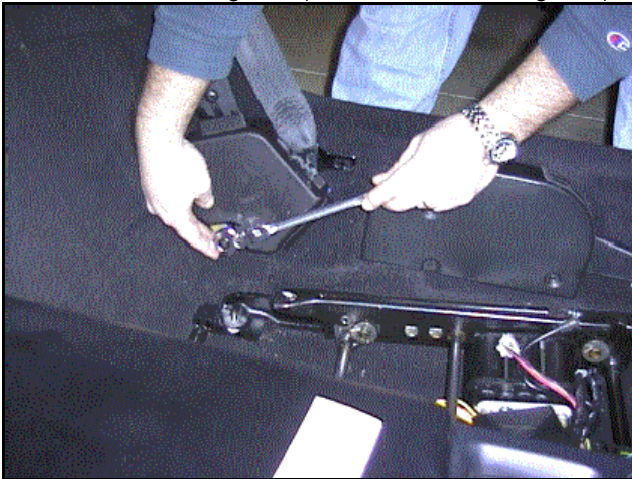


Figure 1

**Step 4**

With the retractor out of the way, position the outside seat belt mounting bracket as shown below.  
(see figure 2)



**Figure 2**

**Step 5**

Reposition the retractor and reinstall the factory bolt as shown below.  
(see figure 3)



**Figure 3**

**Step 6**

Repeat steps (1 - 5) for the passenger side.

Performance driving events are by nature potentially hazardous to your health. Brey~Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.