

R-1030

996 - HARNESS MOUNT INSTALLATION INSTRUCTIONS

Note: This bar is designed to mount in a 996 coup and provide mounting points for a shoulder harness.

Step 1

Remove both rear and lower seat cushions with velcro and lift right out. Doing this gains access to the outside rear seat belt mounting points. (See figure 1)



Figure 1

Step 2

Remove both outside rear seat belt mounting bolts and hardware. Position support rods and reinstall seat belt and mounting hardware just the same as it came off. Do not tighten at this time. (See figure 2)

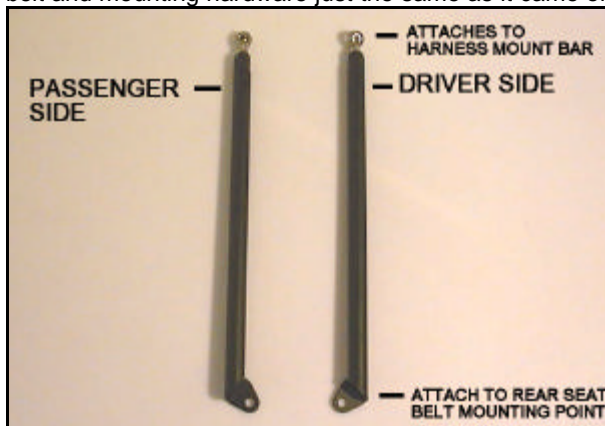


Figure 2

Step 3

Lower seat backs & remove carpet between seat backs and the rear packing shelf. This is held in by velcro also. Doing this gains access to the rear strut mounting points as shown. (See figure 3)



Figure 3

Step 4

Remove the (3) strut mounting nuts on each side. Position the rear mounting bar as shown. (See figure 4)
Reinstall nuts and torque to factory specs. Reposition carpet.



Figure 4

Step 5

Attach the harness mounting bar to the rear mounting bar with the supplied hardware as shown.
(See figures 5 & 6)



Figure 5



Figure 6

Step 6

Attach rod ends from the support rods (See figure 7) to the harness mount bar using the supplied hardware.



Figure 7

Step 7

Tighten rear seat belt mounting bolts left loose from step 2.

Step 8

Check that all hardware is tight.

Step 9

When removing harness mount between track events, leave mount bar portion installed.

Performance driving events are by nature potentially hazardous to your health. Brey-Krause Mfg. Co. Inc. shall not be liable for injury, consequential, or other types of damages resulting from the use or misuse of our products. Proper installation of these parts is critical and should only be done by a professional shop.